



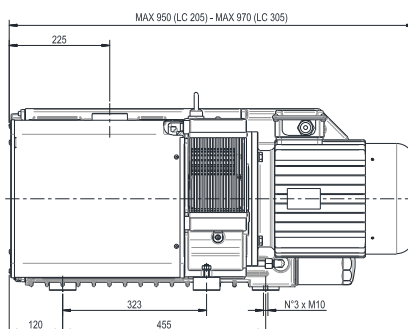

Main Accessories	LC 305
Minor Spare Part Kit	K9603041
Major Spare Part Kit	K9603041/1
Shock Mounts	Fitted
Inlet Filter	9001019
Inlet Filter Element	1801014
Outlet Filter	9001019
Outlet Filter Element	1801014

PRODUCT DESCRIPTION:



The LC 205 and LC 305 pumps are equipped with:

- Oil check valve
- Exhaust mist eliminator
- Automatic floating oil recovery valve
- Gas Ballast with manual override valve
- Shock mounts
- Oil filter with by-pass
- Flexible transmission coupling
- BV100 (SW100) Oil Pack

The LC 205 and LC 305 oil-lubricated rotary vane vacuum pumps are upgraded pumps in design and performance. Among the main innovations, greater efficiency in the process of separating oil from air ensures a smokeless flow of exhaust air. Low noise is enhanced, as well as energy efficiency, thanks to the IE3 efficiency class motors. The gas ballast has a manual override valve, designed to achieve a higher vacuum level when required. The ease of maintenance has also been improved: the oil separator filter is unique and can be replaced in a few simple steps.

MAIN APPLICATION FIELDS:

Food processing and packaging; non-food packaging.

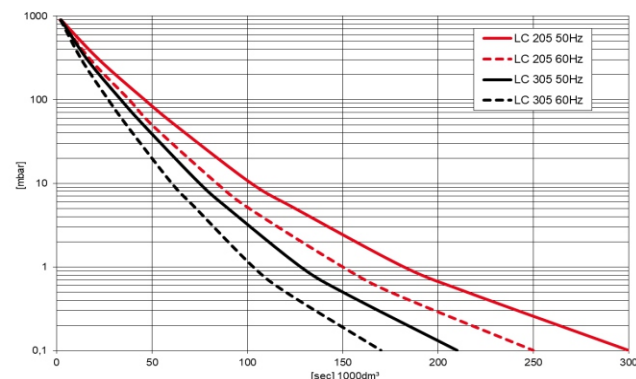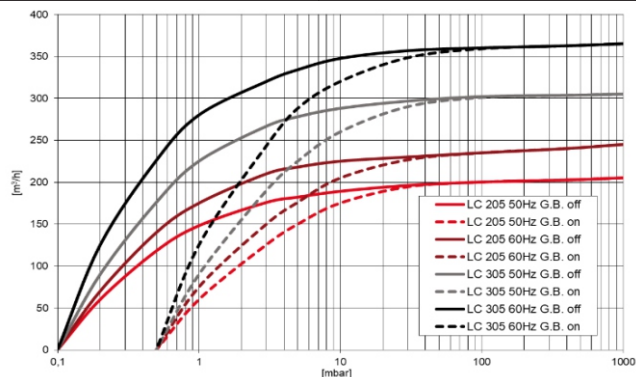

NOTE: Graph shows inlet pressure at a temperature of 68°F (tolerance ±10%)

	LC 305
Part Number	9603041/SG
Voltage	208-230V/460V
Nominal Capacity	215 CFM
Total Final Pressure (Abs.)	29.92 inHg / .1 Torr
Motor Power	12.1 HP
Nominal r.p.m.	1700
Noise Level dB(A)	73
Weight	397 Lbs
Oil Type	SW 100
Oil Quantity	4 to 5 Liters
Pump Intake/Outlet	2" / 2"
Operating Temperature	176°F - 185°F
Dimensions	38" X 21.4" X 17.5"

Please contact the Manufacturer if environmental conditions are different from those prescribed.